



3-Way Manual Directional Control Hydraulic Cartridge Valve

Functional Symbol

FS-0



FS-2



Description:

The 3-Way, 2-Position Manual Detented Directional Control Cartridge valve is suited for all 3-way hydraulic circuit applications where manual operation is desired.

Operation:

All 2-position options require detent option.

Features:

- Several actuator options.
- Detented
- Compact size for minimal space requirements.
- Industry standard C10-3 cavity.

Ratings:


Nominal Rated Flow: 6 GPM (22.7 lpm)

Operating Pressure: 5,000 PSI (345 bar) all ports.

Operating Temperature: -31 to 250°F (-35 to 121°C)


Leak Rate: Less than 82cc (5 in³) per minute

Approx. Weight: .5 lbs. (0.23 kg)

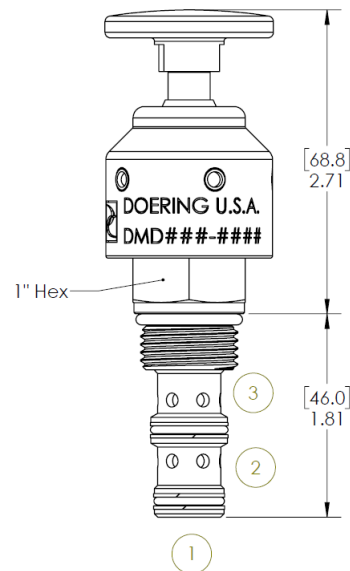

Seal Replacement Kits, External:	
SRK-10-3N	Buna-N
SRK-10-3V	Fluorocarbon (Viton)
Note: Alternate materials available, contact Doering.	

PRESSURE DROP / FLOW

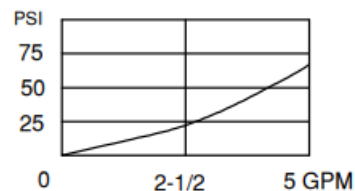

Ordering Information:

DMDA	10 - 3	0	R	N			
Model	Cavity	Spool Fuction		Control	Seal Material	Material/Coating	
DMDA	10 3	0	FS-0	K Hand Knob	N Buna-N	Blank	Plated Steel
		1	FS-1	R Hand Knob, Red	V Viton	SS	Stainless Steel
		2	FS-2	S Hand Knob, SST	E EPDM	SS316	316 SST
		4	FS-4	S316 Hand Knob, 316 SST	W Low Temp Buna-N		
		5	FS-5				
		6	FS-6				
		7	FS-7				