
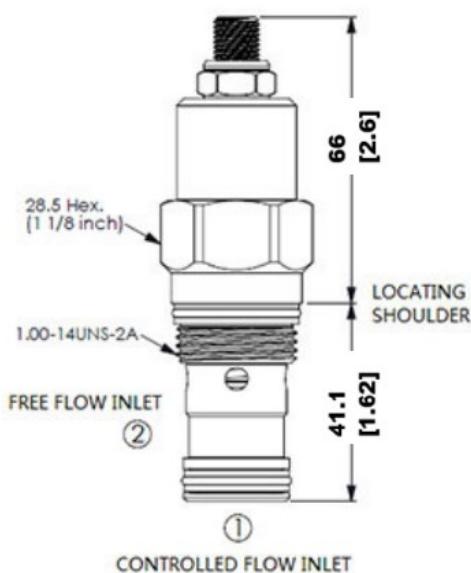


## PCFA Fully Adjustable Pressure Compensated Flow Control Valve with Reverse Flow Check

### Functional Symbol

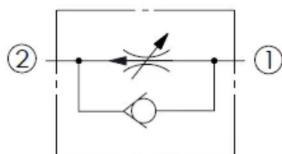

### Description:

A screw-in cartridge, fully adjustable, pressure-compensated flow controls with reverse flow check.

### Operation:

Fully adjustable, pressure-compensated flow controls with reverse flow check provide precise flow regulation for meter-in or meter-out applications where there may be wide pressure fluctuations. They are infinitely adjustable from nearly closed up to the maximum flow. An integral high-capacity check valve provides unrestricted flow from port 2 to port 1.

### Features:

- Hardened, precision ground parts for durability.
- Adjustment may be locked in place.
- Compact size for minimal space requirements.
- Industry Common T-5A cavity.

### Ratings:

Rated Flow: 12.0 GPM (45 lpm)

Operating Pressure: 5,000 PSI (345bar)

Operating Temperature: -22° to 250°f (-30° to 120°c)



Fluids: Mineral-based fluids with viscosities of 7.4 to 420 cSt.

Filtration: 25μm or better

Installation Torque: 37 - 44 lbf-ft (50-60 Nm)

Seal Replacement Kits, External:	
SRK-T-5AN	Buna-N
SRK-T-5AV	Fluorocarbon (Viton)

Note: Alternate materials available, contact Doering.

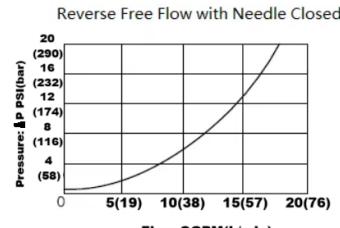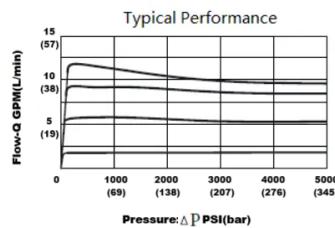

### Ordering Information:

PCFA T5 - A N - CSZ

Model	Cavity	Control	Adjustment Range	Seal Material	Material / Coating
PCFA	T5 T-5A Cavity	Blank Std. Screw Adjustment	A .2 - 12 GPM (0.8 - 45 lpm) B .2 - 3.0 GPM (0.8 - 11 lpm)	N Buna-N V Viton	CSZ Plated Steel